

Chiller-Heat Pump Controller 1 circuit- 2 compressors



Description

ECH 200 family is a range of compact devices that permit to control air conditioning units of the following types:

- water-air
- air-water
- water-water
- condensing units

single-circuit, with 1 or 2 compressors (stages).

It is possible to control condensation fan speed proportionally for currents of up to 2 A without using external devices.

The Main Features of the controllers are:

- Temperature control based on inlet or outlet probe, depending on the type of machine and its configuration
- Condensation control on temperature or pressure
- Automatic change-over on outdoor temperature
- Boiler or supplementary electrical heater control for heating
- Internal fan control up to 3 stages in the air-air application
- Dynamic set point on outdoor temperature
- Dynamic Defrost
- Parameter setting from the keyboard or through a personal computer
- Copy card for uploading and downloading parameter maps
- Remote keyboard (up to 100 m) which may be connected up directly without a serial interface
- 4-20 mA or 0-10 V output (**ECH210A**)
- User interface with a menu featuring 2 different levels of access through password management
- ModBus protocol ("B" Models)
- Televis protocol

- **Adaptive Function to manage Chiller/Heat Pump without water tank (ECH210BD, ECH215BD)**

Using a personal computer with PARAM MANAGER the user has very helpful software tool that guides the configuration of the controller easily and quickly using simple icons or default configuration.

Models

A series of models and optional DEVICES are available to cover a wide range of different applications and installations.



ECH210(B)

Chiller: 1 stage Heat Pump or 2 Cool, Integrated control of fan speed (max 2A) + PWM (+ ModBUS)**



ECH210(B)A

Chiller: 1 stage Heat Pump or 2 Cool, Fan speed control with 4-20mA/0-10V+ PWM (+ ModBUS)**



ECH211(B)

Chiller: 2 stages Heat Pump, Fan speed control with PWM (+ModBUS)**



ECH215B

Chiller: 2 stages Heat Pump, Fan speed control only ON/OFF **ModBUS**



ECH210BD

Chiller: 1 stage Heat Pump or 2 Cool, Integrated control of fan speed (max 2A) + PWM, ModBUS + **Adaptive Function**



ECH215BD

Chiller: 2 stages Heat Pump, Fan speed control only ON/OFF, Modbus + **Adaptive Function**



Optional Keyboards



EKW200 BLK

Wall Mounting remote keyboard



EKW200/S BLK

Wall Mounting remote keyboard with internal temperature sensor

Expansion



EXP211

Expansion module for ECH200 to control second stage heat pump **DIN RAIL MOUNTED**

**** ModBUS available only on "B" models**



Features

Keyboards

Model	ECH 210(B)	ECH 211(B)	ECH 210(B)A	ECH 215B	EKW200 BLK
Part Number	MW320010	MW320030	MW320020	-	MW320600
Part Number (B models)	(MW320012)	(MW320032)	(MW320022)	MW320040	-
Part Number Adaptive models	ECH210BD MW320212	N.A.	N.A.	ECH215BD MW320240	
Application					
Chiller	••	••	••	••	
Chiller/Heat Pump	••	••	••	••	
Condensing Unit	••	••	••	••	
Packaged Unit	•	•	•	•	
Ducted Split	•	•	•	•	
Configuration					
Circuits	1	1	1	1	
Evaporators	1	1	1	1	
Compressors	2*	2	2*	2	
Compressors Stages	1 or 2	1 or 2	1 or 2	1 or 2	
Fan ON-OFF	1	1			
Continuous Fan (modulating, proportional)	•	•	•		
Water Pumps	1	1	1	1	
Electric Heaters	1	1	1	1	
Input/Output					
Digital Inputs	5	5	5	5	
Temperature Probes	3	3	3	3	
Configurable Probes (Temperature/Pressure)	1	1	1	1	
Relays	4	4+1**	4	5+1**	
Triac Output 24V~	500 mA	500 mA	500 mA	500 mA	
Triac Output 230V~	2A max	500mA	500mA		
4...20 mA Outputs			1		
0...10 V~ Outputs			1		
PWM Outputs (for Fan Speed)	1	1	1		
• compatible * only cooling mode					
•• recommended ** with EXP211 external socket					
EWK200/S BLK					
MW320602					
-					
1					
Expansion					
EXP211					
MW320100					
-					

Features common to all models					
Functions		Diagnostic		Connectivity	
Heat Pump		Faulty Sensor		TTL	
Balancing Compressor Hours		High Pressure		Modbus	
Standard Defrost		Low Pressure		Mechanical	
Dynamic Defrost (only “B” models)		Thermal Compressor Protection		Panel Mounting	
Dynamic Set Point		Thermal Fan Protection		Plastic Box	
Condensing Temperature Control		Water Flow Protection		Fast Connectors	
Condensing Pressure Control		Antifreeze Alarm			
Auto Change Over		High Inlet Temperature			
Remote Change Over					
Remote ON-OFF					

User Interface



DOWN key
Reset Alarms/Switch ON-OFF/DOWN or SCROLL DOWN



UP key mode change
(e.g. standby-cool-heat-standby/UP or SCROLL UP)



UP/DOWN keys press together
one level UP/DOWN



LED compressor 1
ON if compressor 1 active/OFF inactive/BLINK timing count



LED compressor 2
ON if compressor 2 active/OFF inactive/BLINK timing count



LED cooling
ON if device in cooling mode



LED heating
ON if device in heating mode



LED defrost
ON if def. active OFF ended-disabled/BLINK timing count



LED anti-freeze
ON if antifreeze-heater-boiler active/OFF if inactive

KEYS

LEDs

Accessories



Transformers

TF411200: 230/12V - 5VA for ECH200 (protected)



Probes

NTC probe 103AT, 1,5m (plastic cap, 2wires cable)

NTC probe 6x40, 1,5m (metal cap, silicon or PVC cable)

NTC probe 6x40, 1,5m (plastic cap, PVC cable)



EWPA030, Pressure transducer 4..20mA/0..30bar

Different lengths are available on request

Fan Speed Controls



- CF-05: Max 2,5A/230V~ (max 500W)

- CF-15: Max 8A/230V~ (max 1500W)

- CF-20: Max 10A/230V~ (max 2200W)

- CF-REL: relay 6A/230V~

- DRV 300: 3 phases 12...20A/420V~ (IP22 or IP55)

Others

COLV0100 - Connecting cable for signal (inputs or low voltage outputs)



COHV0100 - Connecting cable for power (Outputs)

Copy Card: To copy configuration between devices

Technical Data

	Typ.	Min.	Max.
Power supply voltage	12 V~	10 V~	14 V~
Power supply frequency	50/60 Hz		
Power consumption	5 VA		
Insulation class	1		
Operating temperature	25 °C	-10 °C	60 °C
Operating humidity*	30%	10%	90%
Storage temperature	25 °C	-20 °C	85 °C
Storage humidity *	30%	10%	90%

*(non condensing)

Digital Outputs (see also Features table)

Relays 2(2)A - 250V~ (1/4hp 230V~, 1/8hp 120V~)

• n° 4 Relays **ECH210(B)** and **ECH210(B)A**

• n° 4+1** **ECH211(B)** ** with EXP211 external socket

• n° 5+1** **ECH215B** ** with EXP211 external socket

n° 1 Triac 2 A max - 250V~ (only **ECH210(B)**)

n° 1 Triac 500mA (only **ECH211** and **210(B)A**)

n° 1 Triac open collector output for alarm (max 500mA)

Analogue outputs

n°1 PWM output

n°1 4...20mA/0...10V output for fan speed (only **ECH210A** and **ECH210BA**)

Analogue inputs

n° 3 Temperature sensors

n° 1 Configurable input: 4...20mA pressure transducer or temperature sensor

• Temperature resolution: 0,1°K

• Temperature accuracy: 0,8°K in the range 0...35°C

• Pressure resolution: 0,1bar

• Pressure accuracy: 1% end scale

Digital inputs

n° 5 Voltage free digital inputs

Serial output

n° 1 TTL output for PC or network connection (9600Baud)

NOTE: Input and outputs features are configurable by parameters

Terminal and connectors

n°1 quick coupling 9 -pin connector for high voltage output

n°1 quick coupling 16 -pin connector for low voltage signals

n°1 5 -pin connector for serial output or copy card

n°1 3 -pin connector for remote keyboard

n°1 2 or 3 -pin connector for optional modules

Installation

Dimensions: 76x34x58 mm.

Housing: PC+ABS plastic resin with V0 extinguishing class.

Assembly: Panel, on 71x29 mm hole.


IP protection: IP65 on the front.

Wiring Diagrams

210

210B


210BD

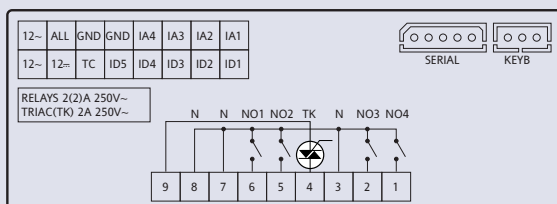

Wiring Diagrams


210A

210BA

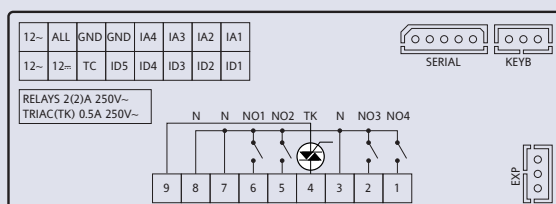

211

211B

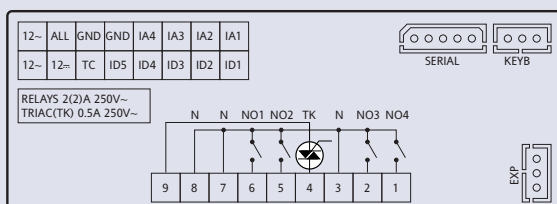

215B

215BD



Description Wiring Diagram

Labels

SERIAL TTL Serial Connection for Copy Card or PC
KEYB Connection to Remote Keyboard
EXP Connection to Expansion

IAx Analogue Input x
IDx Digital Input x
12 12 V~
GND Ground
N Neutral
NOx Digital Output x
TC Output for external fan modules PWM
TK Triac
ALL Alarm
NC Not connected

Regulations

The product meets the following CEE Directives:

- 73/23/CEE Council directive and subsequent modifications
- 89/336/CEE Council directive and subsequent modifications and meets the requirements of the following Armonised regulations:
- LOW VOLTAGE: EN60730
- EMISSION: EN50081-1 (EN55022)
- IMMUNITY: EN50082-2 (IEC 1000-4-2/3/4/5)

eliwell

Eliwell & Controlli s.r.l.

Via dell'Industria, 15 Zona Industriale Paludi
 32010 Pieve d'Alpago (BL) ITALY
 Telephone +39 0437 986111
 Facsimile +39 0437 989066
 Internet <http://www.eliwell.it>

Climate Controls Europe
An Invensys Company

